



## OMEGA Nail-Seal Tape / DSK

A bitumen tape, adhesive on one or both sides, that is attached along the full length between the diffusive roof underlay and the counter-batten. It prevents ingress of rainwater and guarantees optimum wind-tightness of the construction. Tested for protection from rain by the Austrian Wood Research Association, (Holzforschung Austria Order no. 203/2003/2 T/HH).

### FIELD OF APPLICATION

- a seal for nails and screws below the counter battens

### ADVANTAGES

- easy to use
- good adhesion on wood and underlays
- good elastic properties



### AVAILABLE IN THE FOLLOWING DIMENSIONS

Roll length	10 m	10 m	10 m
Roll width	50 mm	60 mm	80 mm
Carton contents / Rolls	20	16	12
DSK Carton contents / Rolls	6	6	-

### PRODUKT DATA

Composition	self-adhesive bitumen tape
Thickness	2 mm
Working temperature	+ 5 °C - + 40 °C
Temperature resistance	- 40 °C - + 100 °C
Storability	1 year; cool and dry

INFO :  
+43 (0) 6216 / 4108  
WWW.ISOCELL.COM

**ISOCELL**

## GUIDELINES FOR USE OF **OMEGA** Nail-Seal Tape DSK



---

Attach OMEGA Nail Seal Tape to the roof sheeting directly beneath the counter-batten.

Glue the OMEGA DSK nail-seal tape directly to the lower side of the counter battens, then position and fix the batten.

The sealing tape encloses the nail completely and achieves a 100% sealed penetration point! See Guidelines for OMEGA Roof Underlay

The standards according to ÖNORM B 4119 and/or ZVDH (Central Association of German Roofers) must be observed.

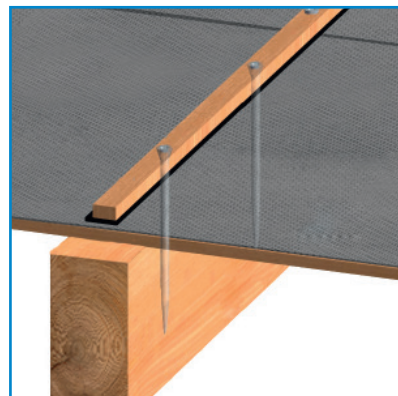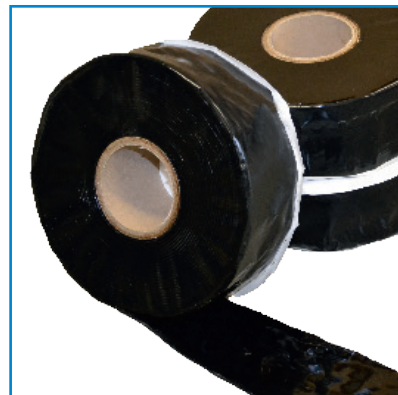

INFO :  
+43 (0) 6216 / 4108  
[WWW.ISOCELL.COM](http://WWW.ISOCELL.COM)

**ISOCELL**