



## PE Nail-Seal Tape DSK


Is a double-sided adhesive PE foam tape that is used as nail-seal tape in the area of the counter battens. Tested for protection from rain by the Austrian Wood Research Association, (Holzforschung Austria Order no. 203/2003/2 T/HH).

### FIELD OF APPLICATION

- Nail seal for roof underlays minimum roof pitch  $\geq 5^\circ$

### ADVANTAGES

- easy to use
- good adhesion on wood and underlays
- the 60mm tape can be used with the nail-seal tape dispenser

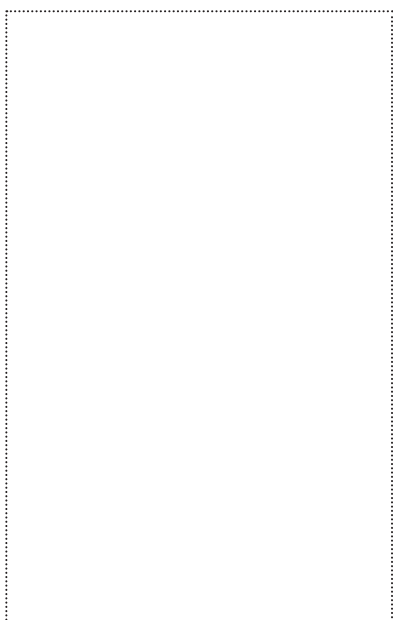

### AVAILABLE IN THE FOLLOWING DIMENSIONS

Roll length	30 m	30 m
Roll width	60 mm	80 mm

### PRODUKT DATA

Composition	closed cell polyethylene foam double-sided adhesive
Thickness	3 mm
Density	30 kg/m <sup>3</sup>
Working temperature	+ 5 °C - + 40 °C
Temperature resistance	- 40 °C - + 80 °C
Water consumption (7d)	< 1 Vol.%
Colour	green
Storage	cool and dry



INFO :  
+43 6216 / 4108  
WWW.ISOCELL.COM

**ISOCELL**

# GUIDELINES FOR USE OF PE Nail-Seal Tape DSK

Attach PE Nail-Seal Tape DSK to the roof sheeting directly beneath the counter-batten. The standards according to ÖNORM B 4119 and/or ZVDH (Central Association of German Roofers) must be observed.

The nail-seal tape dispenser has been special developed by ISOCELL. It enables a rational, time-saving and exact positioning of the PE nail-seal tape DSK on the counter batten. This provides additional safety during application. The dispenser can be used both in prefabrication and on site. It is easy to use, saves time and enables exact positioning on the roof battens.

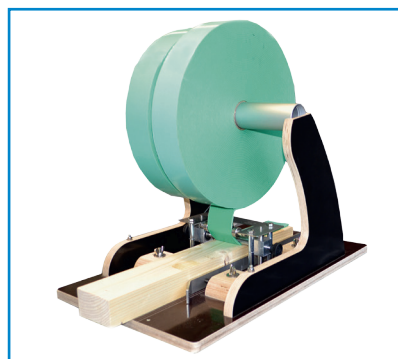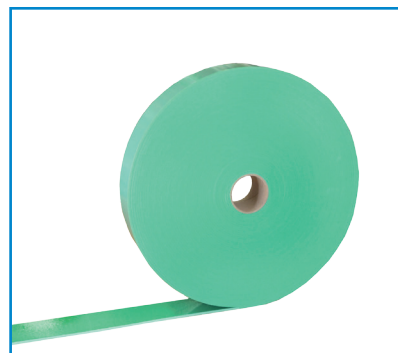

INFO :  
+43 6216 / 4108  
WWW.ISOCELL.COM

**ISOCELL**